


80-125K

SOLARATOR SERIES

Experience Uninterrupted Power with Solis Energy Storage Inverters

S6-EH3P(80-125)K10-NV-YD-H

Three Phase | High Voltage

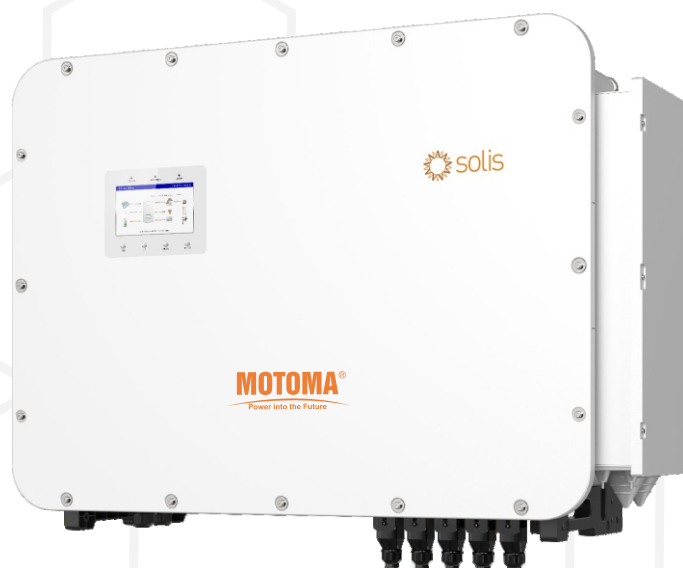

12 Unique Advantages

- Supports up to 2x rated PV input, maximizing solar energy utilization
- Supports a maximum string input current of 21A, ensuring compatibility with high-power PV modules
- Compatible with 100–314Ah battery modules, reducing overall system costs
- Supports fast battery charging with a maximum charging current of 200A
- Two independent battery ports for flexible configurations and easy capacity expansion
- Delivers 160% overload for 200ms in off-grid mode, ensuring stable startup of heavy loads
- Offers flexible control for weak grid and genset-hybrid scenarios, reducing investment costs
- SolisCloud: Smart remote control, AI optimisation, and instant troubleshooting - all in one platform
- Integrates PV and storage for demand management and anti-reverse flow functions
- Provides dynamic reactive power compensation to improve grid power factor and reduce reactive power charges
- Utility bypass function allows direct grid supply to backup loads
- Patented cooling technology ensures reliable operation even under high-temperature conditions

6 Leading Advantages

- Supports both DC and AC coupling, for flexible retrofits and system expansions
- Ensures reliable backup power across diverse scenarios through battery reserve management
- Extends supply time for critical loads with intelligent load prioritization
- Offers a versatile three-in-one interface for seamless integration of on-grid PV, wind power, and diesel generators
- Achieves on- and off-grid transitions in less than 10ms, ensuring an uninterrupted power supply
- Supports multi-unit parallel operation up to 1.25MW (Solis STS cabinet recommended for systems over 6 units)

Solis Three Phase High Voltage Energy Storage Inverters

S6-EH3P(80-125)K10-NV-YD-H

Models	80K	100K	125K
Input DC (PV side)			
Recommended max. PV array size	160 kW	200 kW	250 kW
Max. usable PV input power	160 kW	200 kW	250 kW
Max. input voltage	1000 V		
Rated voltage	600 V		
Start-up voltage	180 V		
MPPT voltage range	150 - 950 V		
Max. input current	10 × 42 A		
Max. short circuit current	10 × 60 A		
MPPT number / Max. input strings number	10 / 20		
Battery			
Battery type	Li-ion		
Battery voltage range	300 - 950 V		
Max. charge / discharge current	200 A / 100 A + 100 A		
Number of battery ports	2		
Max. charge / discharge current of each port	100 A		
Communication	CAN / RS485		
Output AC (Grid side)			
Rated output power	80 kW	100 kW	125 kW
Max. apparent output power	80 kVA	100 kVA	125 kVA
Rated grid voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V		
Rated grid frequency	50 Hz / 60 Hz		
Rated grid output current	121.6 A / 115.5 A	151.9 A / 144.3 A	189.9 A / 180.4 A
Power factor	> 0.99 (0.8 leading - 0.8 lagging)		
THDi	< 3%		
Input AC (Grid side)			
Max. input current	250 A		
Output AC (Back-up)			
Rated output power	80 kW	100 kW	125 kW
Max. apparent output power	75-100K: 1.2 times of rated power, 10 mins; 1.4 times of rated power, 100 s; 1.6 times of rated power, 10 s; 2 times of rated power, 200 ms; 125K: 1.2 times of rated power, 100 s; 1.4 times of rated power, 10 s; 1.6 times of rated power, 200 ms		
Back-up switch time	< 10 ms		
Rated output voltage	3/N/PE, 220 V / 380 V, 230 V / 400 V		
Rated frequency	50 Hz / 60 Hz		
THDv (@linear load)	< 2%		
Input AC (Generator)			
Max. input power	80 kW	100 kW	125 kW
Rated input current	121.6 A / 115.5 A	151.9 A / 144.3 A	189.9 A / 180.4 A
Rated input voltage	3/N/PE, 220 V / 380 V; 3/N/PE, 230 V / 400 V		
Rated input frequency	50 Hz / 60 Hz		
Efficiency			
Max. efficiency	97.6%		
EU efficiency	97.2%		
BAT charged / discharged to AC max. efficiency	97.0%		
Protection			
Anti-islanding protection	Yes		
Output over current protection	Yes		
Short circuit protection	Yes		
Integrated DC switch	Yes		
DC reverse-polarity protection	Yes		
Surge protection	DC Type II / AC Type II		
Integrated AFCI 2.0	Optional	Optional (Brazil: Yes)	
Protection class / Over voltage category	I/ DC II, AC III		
General Data			
Max. allowable phase imbalance (grid & back-up)	100%		
Max. power per phase (grid & back-up)	26.66 kW	33.33 kW	41.66 kW
Dimensions (W × H × D)	1174 × 814 × 400 mm		
Weight	170 kg		
Topology	Transformerless		
Operating ambient temperature range	-25 ~ +60°C		
Relative humidity	0 - 100%		
Ingress protection	IP66		
Cooling concept	Intelligent fan-cooling		
Max. operation altitude	3000 m		
Grid connection standard	G99, VDE-AR-N 4105/VDE V 0124, EN 50549-1&2/EN 50549-10, VDE 0126/UTE C 15/VFR:2019, NTS 631/RD 1699/RD 244/UNE 206006/UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA, PORTARIA Nº 140, DE 21 DE MARÇO DE 2022; Brazil (75K: ORDINANCE (PORTARIA) NO.140, ORDINANCE NO. 515; 100K/125K: NBR 16149, NBR 16150, IEC 62116)		
Safety / EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4, EN 55011		
Features			
PV connection	MC4 Quick connection plug		
Battery connection	Terminal connector		
AC connection	Terminal block		
Display	7.0" LCD display & Bluetooth + APP		
Communication	CAN, RS485-115200, Ethernet, Optional: Wi-Fi, Cellular, LAN		